



# Vogue Combi

C26 C32 C40

8

YEAR WARRANTY\*



NOx class 6



Simple to install  
& service



Easy to use full  
colour display



Frost protection



Stainless steel  
heat exchanger



Up to 40kW  
output




Premium  
components



Touch RF &  
Touch Connect  
Compatible



Add an Ideal  
System Filter to  
increase the Vogue  
boiler warranty by  
an additional 2 years



UP TO  
£55

EARN INSTALLER CONNECT  
POINTS FOR EVERY VOGUE  
COMBI YOU REGISTER

www.idealboilers.com |



welcome to our ideology

\*10 year warranty when installed with an Ideal System Filter. 8 years parts & labour warranty as standard. Terms and conditions apply.

# Features & specification

## PREMIUM QUALITY COMPONENTS

- Hydrobloc incorporating a 24V stepper for enhanced reliability
- Large 10 litre expansion vessel
- Stainless steel heat exchanger
- Low energy modulating Grundfos pump
- 24V gas valve


## EASY TO INSTALL AND SERVICE

- Low boiler lift weight from 32.4kg
- Pre-wired mains lead (2m)
- Cool burner door technology
- Long maximum flue lengths with easy access sampling points
- Easy to read pressure gauge
- Uniform control opening across all Ideal Vogue and Logic combis
- Control box with push-in cable clamps

## END USER BENEFITS

- LPG conversions available on all outputs
- Backlit 3.5" LCD full colour display
- Multi-function buttons for simplified end user operation
- Up to 7:1 modulation
- Service display and installer phone number input
- Rotary control for easier user operation
- Stylish aesthetics with full size door complete with damped opening

## Clearances & dimensions

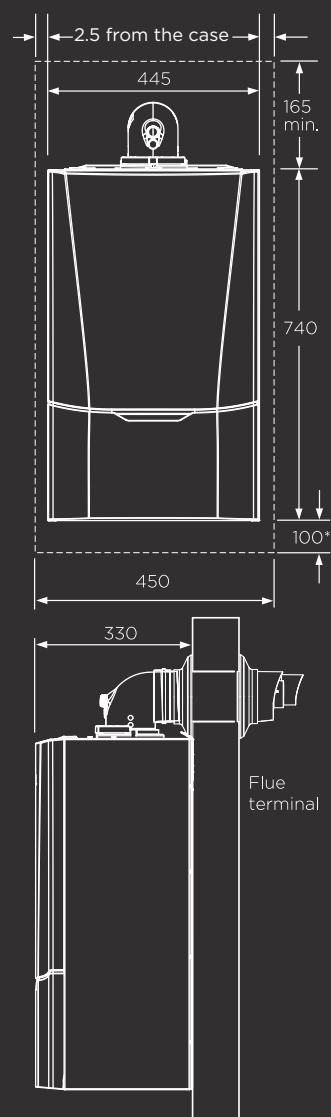

Dimensions in mm.

## Technical specification

VOGUE COMBI MODELS	C26	C32	C40
Weight (packaged) kg	37.6	38.9	40.9
Max installation weight kg	32.4	33.8	35.4
CH output (kW) min/max @ 70°C	3.7 - 18.0	4.6 - 26.0	5.7 - 32.0
CH output (kW) min/max @ 40°C	4.0 - 19.3	4.9 - 27.9	6.1 - 34.3
DHW output (kW) max	26	32	40
DHW flow rate l/min. 35°C rise	10.6	13.1	16.4
SEDBUK rating (2005) %	91	91.1	91
SEDBUK rating (2009/2012) %	89.1	89.2	89.1
NOx classification	CLASS 6	CLASS 6	CLASS 6
LPG conversion	Yes	Yes	Yes
Max horizontal flue	10m	8m	8m
Max vertical flue	10m	10m	10m
Seasonal space heating efficiency class	A	A	A
Seasonal space heating energy efficiency $\eta_s$ %	93	93	93
Sound power level, indoors $L_{WA}$ dB	47	50	49
Water heating energy efficiency class	A	A	A

Clearances & dimensions note: The minimum front clearance when built into a cupboard is 5mm from the cupboard door but 450mm overall clearance with the cupboard door open is required for servicing.  
 \*Bottom clearance after installation can be reduced to 5mm. However, 100mm is required for servicing.

Ideal Boilers, PO Box 103, National Avenue, Kingston upon Hull, East Yorkshire, HU5 4JN.  
**T: 01482 492251 E: ideal@idealboilers.com**