KISO

4E1026 – BATH FILLER

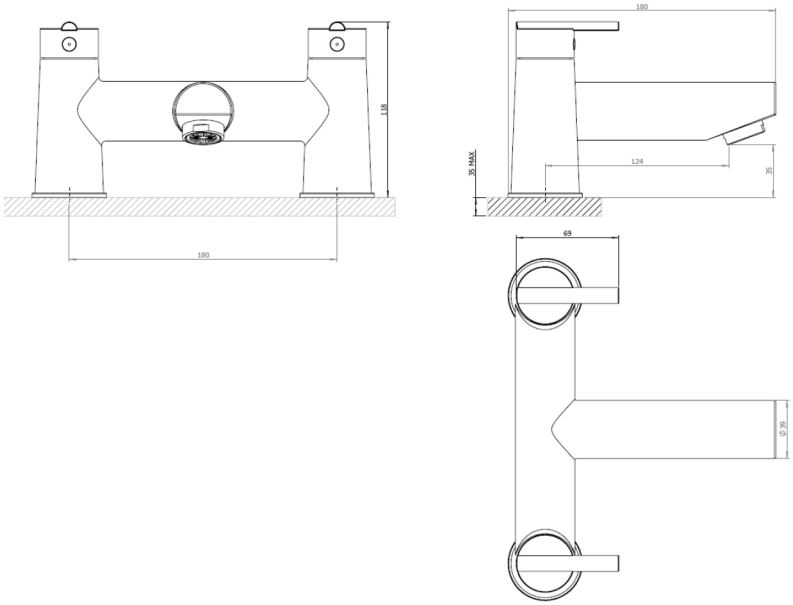

Specification	
Finish	Chrome Plate
Body	Brass
Fittings	Metal backnut & washer
Connection	3/4" BSP Threaded tail
Min dynamic pressure	0.1
Max dynamic pressure	6
Max static pressure	25
Max water temperature	60°C

Flow rates

Pressure	**0.1**	**0.5**	**1**	**3**
L/min	9.6	37.4	54.8	97.4

All Pressures are in Bar.

Dimensions supplied are nominal and subject to tolerance.

Inclusion of aerator (if supplied) or restrictors (sold separately unless stated) will affect flow rate result.

Performance details are based on trials under test conditions and for guidance only.

The Company reserves the right to change product specification without prior notice.

Features & Benefits

10 YEAR Guarantee	L Low Pressure	Inlet Tail	Flow Straightener
Single Flow			

Certifications

21.3 l/min	
Tested @ 0.2 bar	