
## PB4ZS & PB6ZS Four/Six Zone Slave Unit

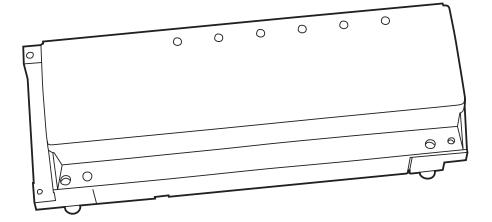

Description: Designed to be used with a PB1ZM Master Wiring Unit the PB4ZS and PB6ZS slave units can be used to connect additional thermostatically controls zones. The units can be used in conjunction with the Polypipe range of 'hard wired' and 'RF' room thermostats\* and can operate up to four individual manifold actuators (PB00401) per zone (230v AC). A series of LED displays are also incorporated which provide a visual indication of the relevant operational mode.

## Polypipe Building Products

Broomhouse Lane Edlington Doncaster DN12 1ES Tel: 01709 770 000 Fax: 01709 770 001

www.ufch.com

2410 London Road Mount Vernon Glasgow G32 8XZ Tel: 0141 778 8822 Fax: 0141 778 2703

Dromore Road Lurgan, Craigavon Co. Armagh BT66 7HL Tel: 028 38 881270

Fax: 028 38 882344

www.polypipe.com

## Technical Data:

Operating temperature: 0°C to 50°C

Protection: Class 1 IP20

Power supply: 230v AC +/- 10%

Fuse Rating: 2.5A


As provided by the PB1ZM

**Polypipe** 



<sup>\*</sup> If using RF thermostats please refer to the relevant electrical schematic for precise wiring details.

## PB4ZS & PB6ZS Four/Six Zone Slave Unit

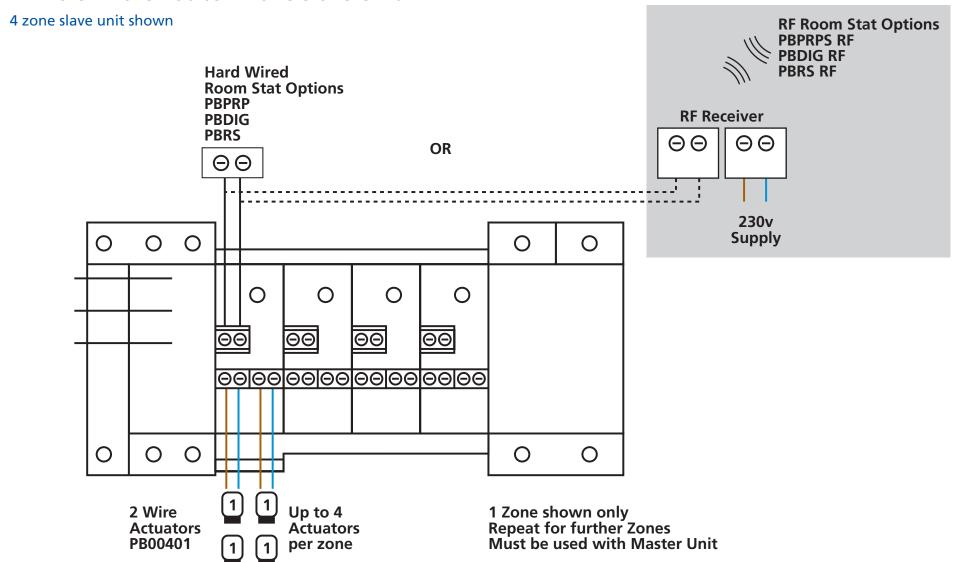

578 Polypipe FH Wired Diagram Leaflet PB4ZS PB6ZS v3.indd 3-4 02/03/2012 16:02