

# Technical Data Sheet | Bathroom Tap

## Firth Mono Basin Mixer (Click Waste) 4E2100




### Specification

|                        |                                                  |
|------------------------|--------------------------------------------------|
| Finish                 | Chrome / White                                   |
| Dimensions             | 174(h) x 50(w) x 172(d) mm                       |
| Weight                 | 1.85kg                                           |
| Body                   | Brass                                            |
| Spout Material         | Brass                                            |
| Fittings               | Metal Plate, Washer, Stud + Locking Nut          |
| Connection             | M12 - DN8 Flexible Hoses with ½" BSP Thread Ends |
| Cartridge Size         | #35 Cartridge                                    |
| Flow Restrictor        | No                                               |
| Max Static Pressure    | 16 Bar                                           |
| Min Operating Pressure | 0.1 Bar                                          |
| Max Operating Pressure | 6 Bar                                            |
| Max Water Temperature  | 60°C                                             |

### Flow Rates

| Pressure          | 0.2 | 0.5 | 1    | 3    |
|-------------------|-----|-----|------|------|
| Flow Aerator      | –   | 2.4 | 3.5  | 3.4  |
| Flow Straightener | 4.3 | 7.6 | 11.1 | 20.7 |

All Pressures in Bar. All flow in L/Min. Dimensions supplied are nominal and subject to tolerance. Inclusion or restrictors (sold separately unless stated) will affect flow rate result. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice.

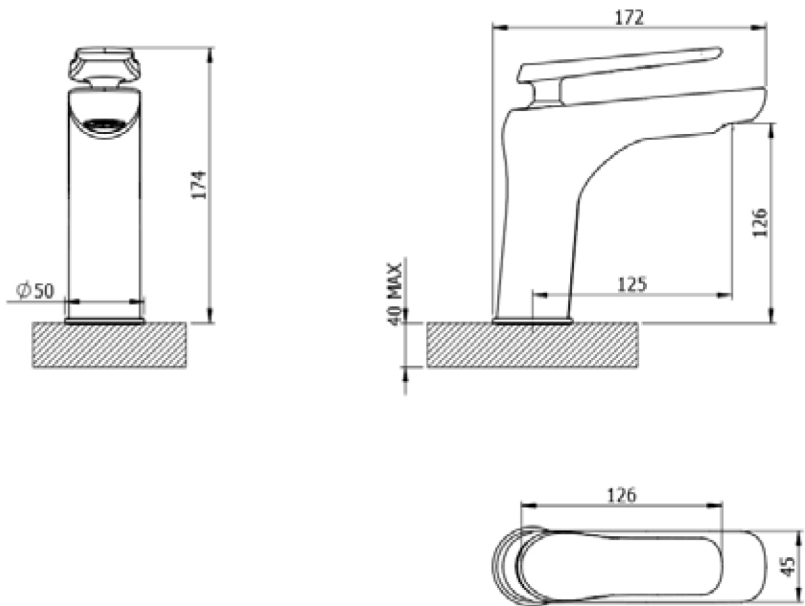

### Key Features + Benefits

10

Years Guarantee

LP

Low Pressure

Mushroom Click Waste

Flow Straightener

Flow Aerator

Flexible Hose

Single Flow

### Certifications + Approvals

Flow Rate – 4.3 l/min

Tested at 0.2 Bar